

Volume measuring type
digital control dispenser

MEASURING MASTER™ **MPP-1**

Ultra-precision constant
volume dispensing of
"liquid material
with varying viscosity."

Set dispensing volume to suit capacity and density

High resolution & high linearity

Tool-less operation for easy maintenance



Dispensing applications



Dispensing into vial bottles



Potting sensor components



OCR (Dam)

MPP-1 Features

■ Wide range of pump capacity variations

Select pump capacity (fully filled volume) to suit application requirements. Various customizations available to suit liquid material specifications.

■ Full-surface dispensing with slit nozzle

Slit nozzle for even full-surface film dispensing in a single pass.


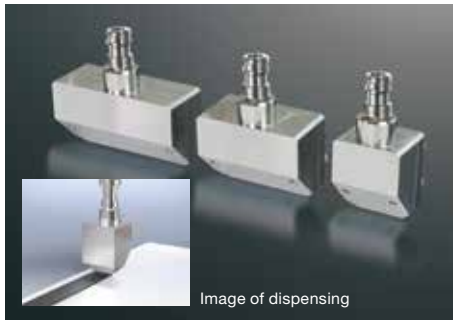


Image of dispensing

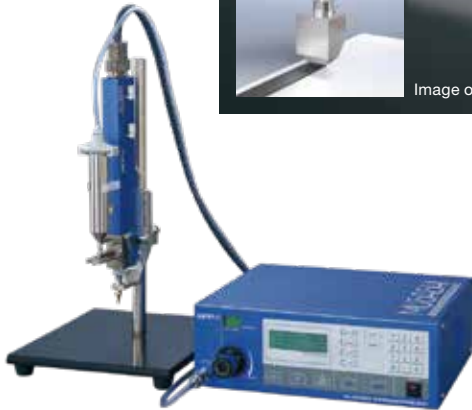


Specifications

Item name	Volume measuring type digital dispenser MEASURING MASTER		
Model	MPP-1		
Dispensing system	Volume measuring type & plunger type		
Control system	Microcomputer digital control system		
Dispensing volume range	Standard type	0.15mL	Select any one of them
	B1 type	0.15mL	
		0.30mL	
		0.65mL	
Minimum dispensing volume setting value	From 0.00001 mL		
Liquid material supply pressure range	0.001 to 0.500 MPa		
Applicable containers	Syringe (10, 20, 30, 50 or 70mL)		
Channel number	400 channels		
Rated voltage and frequency	AC100 to 240 V 50/60 Hz		
Power consumption	25W		
Dimensions	Controller section: W300 × D250 × H111mm (excluding protrusion) Head section: W25 × D86.5 × H320mm (excluding protrusion)		
Weight	Controller section: approx. 4.5kg Head section approx. 850 g (not including container and liquid material)		

Two-component mixing configuration



Outside drawings

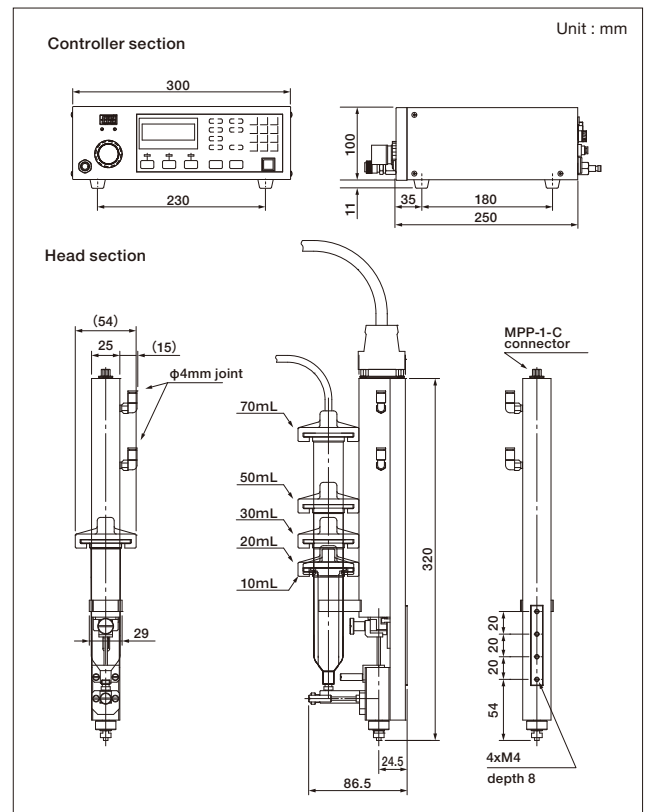

Safety precautions

Please read the instruction manual carefully before use to ensure correct and safe usage.

*These specifications are subject to change without any notice.

*The copyright of this catalog belongs to our company. Reproduction and distribution of the pictures, illustrations and any other information in this catalog to any other media without prior written permission are strictly prohibited; doing so will result in copyright infringement.

MUSASHI ENGINEERING, INC. (headquarters) is certified and registered according to the ISO 9001 Quality Management System and the ISO 14001 Environmental Management System.



<https://musashi-engineering.de>

World Leading Dispenser
MUSASHI ENGINEERING, INC.

HEAD OFFICE

8-7-4, Shimorenjaku, Mitaka, Tokyo, 181-0013, Japan TEL : (81)422-76-7111 / FAX : (81)422-76-7122

BRANCH

TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

SINGAPORE	10 Ubi Crescent # 05-24 Ubi Techpark Lobby B Singapore 408564 TEL : (65)6258-2422 / FAX : (65)6258-4844
THAILAND	No.12 Soi Bangna-Trad 25, Bangna Bangkok, 10260 Thailand TEL : (66)2-022-9015 / FAX : (66)2-769-5450
INDONESIA	Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia TEL : (62)21-8990-5005 / FAX : (62)21-8990-5004
GERMANY	Marcel-Breuer-Str. 15, D-80807 Munich, Germany TEL : (49)89-321996-06 / FAX : (49)89-321996-07
KOREA	(902 No. 9 F. #C, Korea Bio Park.) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea TEL : (82)31-702-3811 / FAX : (82)31-702-3881
TAIWAN	8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070 TEL : (886)3-572-9200 / FAX : (886)3-572-9300

CHINA

HONG KONG	Unit 1706, 17/F., Greenfield Tower, (South)Concordia Plaza, No.1 Science Museum Road, T.S.T.East, Kowloon, H.K. TEL : (852)2620-5799 / FAX : (852)2620-5771
SHANGHAI	A-120 Room, No.525 Xian Feng Street (No.55 Jin Yu Road), Min Hang, Shanghai, China TEL : (86)21-6446-7881 / FAX : (86)21-6446-7882
SHENZHEN	Room 702, West Tian'an Tech Plaza II, Tian'an Cyber Park, Futian District Shenzhen, China TEL : (86)755-8346-6822 / FAX : (86)755-8346-6866
TIANJIN	Room 1206, Sino Ocean International Center, No. 40 Huachang Road, Hedong District, Tianjin TEL : (86)22-5856-2051
SUZHO	Room 1010, No.188 Wang Dun Road, GENWAY BUILDING, Suzhou City Industrial estate District, Jiangsu, CHINA TEL : (86)512-6878-4428 / FAX : (86)512-6878-4438