
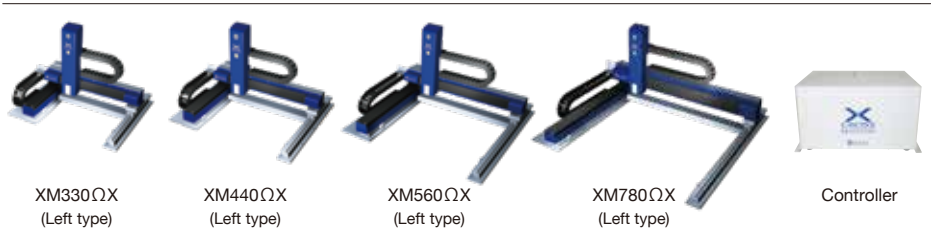



Specifications

Outside drawings

Product name		350PC Smart XMΩX			
Model		350PCS-XM OMEGAX			
Number of controlled axes		3 axes			
Control method		PTP control/interpolation control			
Working area X*Y		300×300 mm	400×400 mm	500×600 mm	700×800 mm
Working area Z		150 mm			
PTP operation speed setting range	X/Y	1 to 500 mm/s			
	Z	1 to 400 mm/s			
Interpolation operation speed setting range	X/Y	0.1 to 500 mm/s			
	Z	0.1 to 400 mm/s			
Repetitive positioning accuracy X/Y/Z		±0.005 mm			
Tool payload		8.7 kg			
Number of signal points	General-purpose input	19			
	General-purpose output	12			
Program capacity		300 recipes, 40,000 steps (999 channels)			
Program editing software		MuCAD™V			
Software display language		Japanese/English/Chinese/Korean			
Main functions		3D alignment, work height measurement, nozzle height detection, offset, nozzle gap correction, automatic focus, log			
Interpolation		3D line, 3D circular arc/circular, 3D elliptical arc/ellipse, spline			
Options		Teaching pendant set, external operation box, holder units, signal tower, dispenser connection cable			
Rated voltage and frequency		Single phase, AC200-240 V, 50/60 Hz			
Power consumption		420 W			
Conformity standards		CE-marking (Machinery Directive, EMC Directive), EU RoHS			
Main unit dimensions (excluding protrusions)	Width (W)	831mm	931mm	1031mm	1239mm
	Depth (D)	671mm	771mm	971mm	1171mm
	Height (H)	630mm			
Main unit weight		80kg	91kg	120kg	143kg
Controller dimensions (excluding protrusions)		W450×D340×H265 mm			
Weight of dispense controller		18 kg			
350PCS control box dimensions (excluding protrusions)		W130×D280×H265 mm			
Weight of 350PCS control box		4.3 kg			

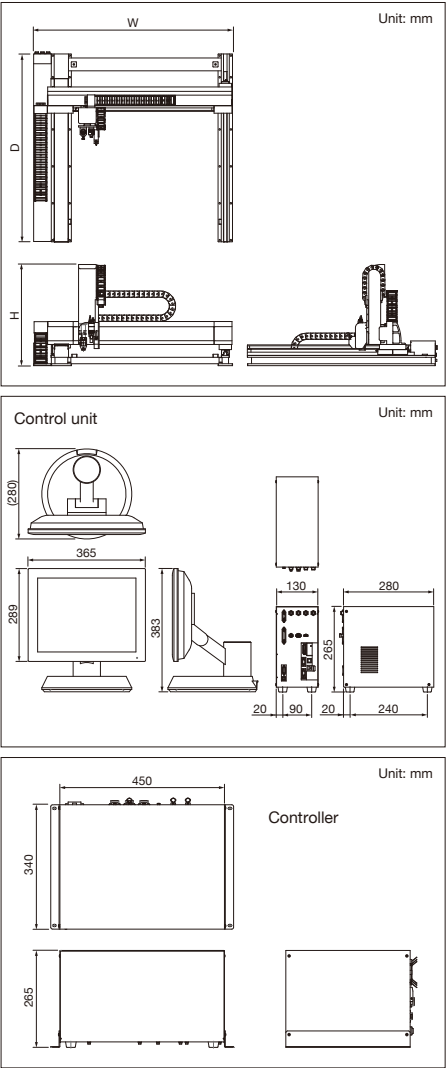

 Safety precaution  
Make sure to read the instruction manual before you use the unit, for your safety.

\* We reserve the right to change the specifications without notice.  
\* All copyrights are retained by MUSASHI ENGINEERING. Reprinting, reproducing, and/or transmitting as electronic data in whole or in part these material without prior written permission is strictly prohibited.

MUSASHI ENGINEERING, INC. is certified and registered according to ISO14001 ENVIRONMENTAL MANAGEMENT.




<http://musashi-engineering.de>

World Leading Dispenser  
**MUSASHI ENGINEERING, INC.**

**SINGAPORE** 114 Lavender Street, #08-88/89 CT Hub 2, Singapore 338729  
TEL : (65)6258-2422 / FAX : (65)6258-4844  
**THAILAND** No.12 Soi Bangna-Trad 25, Bangna, Bangkok 10260 Thailand  
TEL : (66)2-022-9015 / FAX : (66)2-769-5450  
**INDONESIA** Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia  
TEL : (62)21-8990-5005/ FAX : (62)21-8990-5004  
**GERMANY** Marcel-Breuer-Str. 15, 80807 Munich, Germany  
TEL +49 (89) 321 996 - 06 / FAX +49 (89) 321 996 07  
**KOREA** (902 No. 9 F. #C, Korea Bio Park.) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea  
TEL : (82)31-702-3811 / FAX : (82)31-702-3881  
**TAIWAN** 8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070  
TEL : (886)3-572-9200 / FAX : (886)3-572-9300

**CHINA**  
**HONG KONG** Unit 1706, 17/F., Greenfield Tower.(South)Concordia Plaza, No.1 Science Museum Road, T.S.T.East, Kowloon, H.K.  
TEL : (852)2620-5799 / FAX : (852)2620-5771  
**SHANGHAI** A-120 Room, No.525 Xian Feng Street (No.55 Jin Yu Road), Min Hang, Shanghai, China  
TEL : (86)21-6446-7881 / FAX : (86)21-6446-7882  
**SHENZHEN** Room 702, West Tian'an Tech Plaza II, Tian'an Cyber Park, Futian District Shenzhen, China  
TEL : (86)755-8346-6822 / FAX : (86)755-8346-6866  
**TIANJIN** Room 1206, Sino Ocean International Center, No. 40 Huachang Road, Hedong District, Tianjin  
TEL : (86)22-5856-2051  
**SUZHOU** Room 1010, No.188 Wang Dun Road, GENWAY BUILDING, Suzhou City Industrial estate Distric, Jiangsu, CHINA  
TEL : (86)512-6878-4428 / FAX : (86)512-6878-4438



Cartesian robot with PC control image recognition

**IMAGE MASTER™**  
**350PC Smart XMΩX**



The fusion of dispensing “core” technologies  
**Inline 3D dispensing brings better quality!**






Automatic correction for individual differences in works and pallet array errors


# Complete 3-D alignment

Without alignment

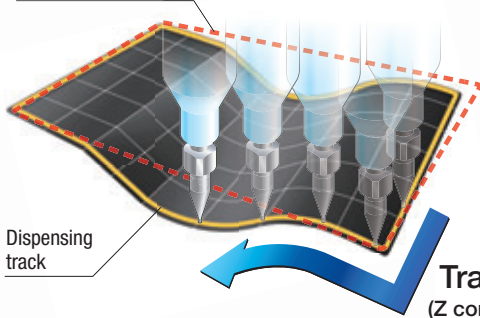

Dispensing track

Tracing  
(Z correction)




Complete correction of  
device position deviation




Program generation/dispensing/measurement/log management


## Applications

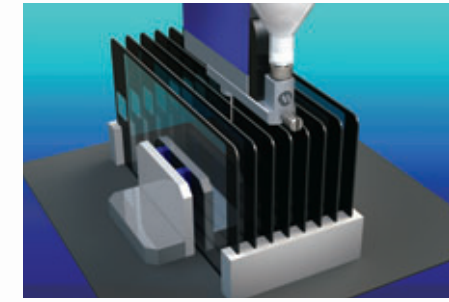


Dispensing on glass sides

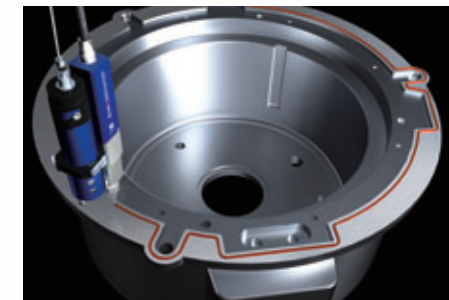

Dispensing gaskets on motors

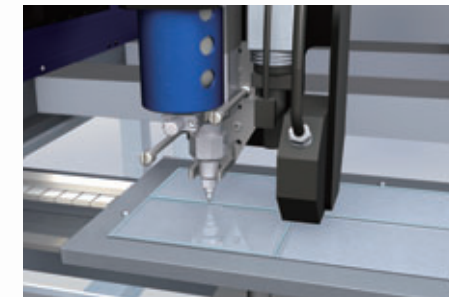

OCR dam dispensing

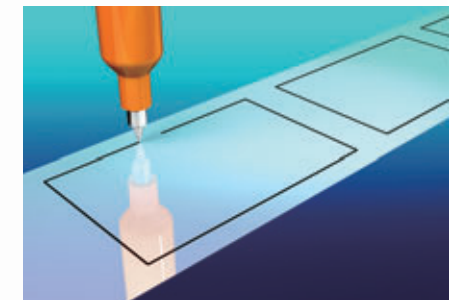

Dispensing adhesive on film

**Field Network Supported**  
With CROSS MASTER™ QX specifications


## ◆ Yield improvement thanks to high-quality dispensing

**Class-leading  $\pm 0.005$  mm repetitive positioning accuracy**

**Support for various work shapes**  
**Edge-detection function**  
**NEW**

Position of works can be adjusted using image processing in a broader range of conditions, including works that could not be detected previously.


Devices with irregular corner cutting




**Coordination with dispenser**  
**SynchroSpeed™ function**  
**NEW**

Achieve a constant drawing width that is independent of robot speed. High-quality dispensing is implemented without the need for complicated adjustments.

Conventional tech.




Synchro Speed™



Right-angle dispensing

### Dispensing pattern editing software **MuCAD™**

- Switch product types instantly.
- Displayable DXF and Gerber file
- Automatically generates array program
- Automatically generates chip patterns on a wafer
- Easily divides into paint and no-paint areas



Aiming for higher dispensing quality

### Strengthened linkage with the dispenser

- Able to dispense any complex shapes
- Available to change the dispensing condition setting for each dispensing point
- Eliminates difficult adjustment to help improve productivity

Improved operability

### New teaching pendant

- Easy to transfer programs to multiple robots **NEW**




Multi-skill support

### Enhanced hardware components

- No misalignment by closed loop control
- Prevents the robot head from falling during emergency stops
- Full connectivity, with 19 input and 12 output signals **NEW**
- Fast communication with **MuCAD™** **NEW**

### Allows mounting of multiple dispensing units

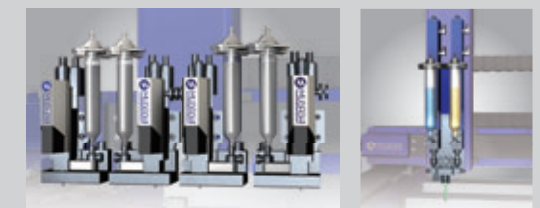

With CROSS MASTER™ QX specifications