

NEW

High-capacity volumetric
digital control dispenser

MEASURING MASTER
MPP-5
Head M


Quantitative dispensing
of viscosity-varying
liquid materials.
Exceptional
“Dispensing Precision”.

*A comprehensive lineup from small to
large flow rates*


*Enhanced error detection capabilities
and improved usability*

*Equipped with production management
features <Log management, Self-diagnosis>*


Dispensing Applications

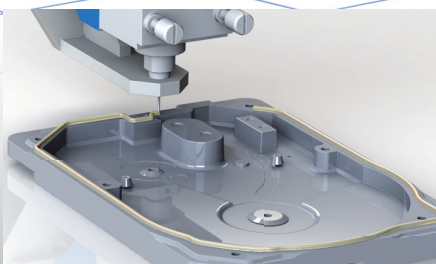

CIPG(Gasket)

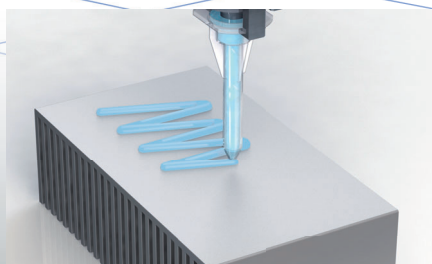

2-component thermal adhesive

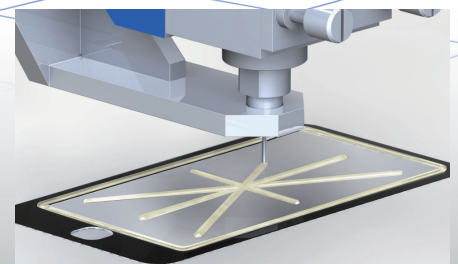

OCR(Fill)

Features of MPP-5

Compatible with various liquid containers

Compatible with barrels (170, 340 mL) and even with tank connections. Selecting containers based on usage and production requirements.



2-component mixing configuration





Specifications

Product name	Volumetric digital control dispenser MEASURING MASTER					
Model	MPP-5-H-M					
Dispensing System	Volumetric type & Plunger type					
Pump unit mode *	MPP-5-P-M-PU-12-1	MPP-5-P-M-PU-32-1	MPP-3-PU-51-1	MPP-3-PU-51B2-1	MPP-3-PU-73-1	MPP-3-PU-73B2-1
	MPP-5-P-M-PU-12B1-1	MPP-5-P-M-PU-32B1-1	MPP-3-PU-51B1-1		MPP-3-PU-73B1-1	
Liquid feeding block unit model	MPP-3-LB(01/02)-1		MPP-3-LB(01/02)-1	MPP-3-LB(03/04)-1	MPP-3-LB(01/02)-1	MPP-3-LB(03/04)-1
Nozzle Cap model *	MPP-3-NC(02/03/04/05/06/07/08)-1					
Main functions	Precision dispensing of viscosity-varying liquid materials					
Dispensing volume range	0.0001 to 1.2000 mL	0.0001 to 3.2000 mL	0.0001 to 5.1000 mL	0.0001 to 7.3000 mL		
Dimensions (excluding protrusion)	68.1 mm					
	Width (W)					
	Depth (D)					
Weight	Controller Approx. 4.6 kg/Head Approx. 2.8 kg (excluding protrusion and liquid materials)					
	Height (H)	408 mm	391 mm	408 mm	391 mm	
Applicable liquid materials	Grease, Encapsulating resin, UV adhesive, etc.					
Applicable liquid materials viscosity	1 to 100,000 mPa·s (reference range)					
Applicable nozzles *	Our company's nozzles and needles					
Liquid material supply container	Our company's barrel cartridge (170~340 mL)					
Compatibility standard	EU RoHS2, CE Marking (Low Voltage Directive, EMC directive)					
Channel number	400 CH					
Rated voltage and frequency	AC100-240 V, 50/60 Hz					
Power consumption	75 W					

* MPP-3-PU-51B2-1 and MPP-3-PU-73B2-1 are configurations for 2-component mixed dispensing. These models do not include a needle adapter, which is required for connecting the nozzle cap and nozzle.

Outside drawings

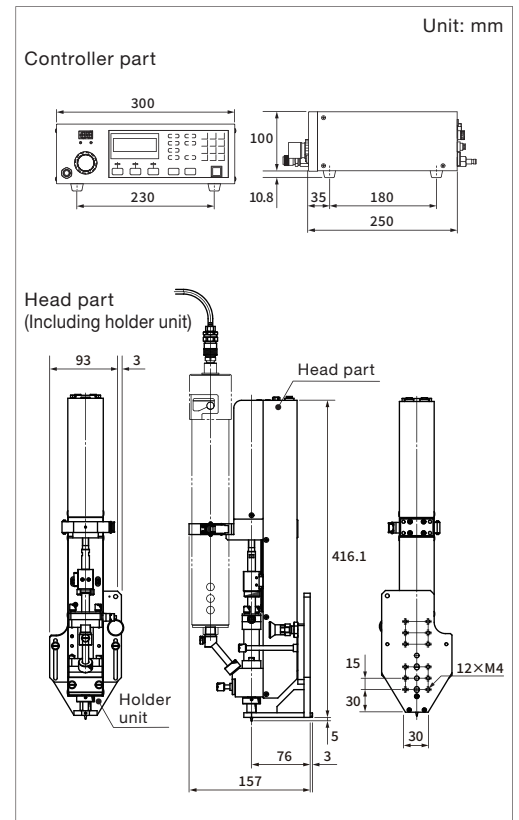

*These specifications are subject to change without any notice.
*The copyright of this catalog belongs to our company. Reproduction and distribution of the pictures, illustrations and any other information in this catalog to any other media without prior written permission are strictly prohibited; doing so will result in copyright infringement.

MUSASHI ENGINEERING, INC. (headquarters) is certified and registered according to the ISO 9001 Quality Management System and the ISO 14001 Environmental Management System.



MUSASHI ENGINEERING, INC.

<http://www.musashi-engineering.com>

**World Leading Dispenser
MUSASHI ENGINEERING, INC.**

HEAD OFFICE
8-7-4, Shimorenjaku, Mitaka-shi, Tokyo, 181-0013, Japan TEL:(81)422-76-7111 / FAX:(81)422-76-7122
BRANCH
TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

SINGAPORE 10 Ubi Crescent #05-24 Ubi Techpark Lobby B Singapore 408564
TEL:(65)6258-2422 / FAX:(65)6258-4844

THAILAND No.36 Soi Bangna-Trad25, Bangnanuea, Bangna, Bangkok 10260 Thailand
TEL:(66)2-022-9015 / FAX:(66)2-769-5450

INDONESIA Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia
TEL:(62)21-8990-5005 / FAX:(62)21-8990-5004

GERMANY Marcel-Breuer-Str. 15, D-80807 Munich, Germany
TEL:(49)89-321996-06 / FAX:(49)89-321996-07

KOREA (902 No. 9 F. #C, Korea Bio Park.) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea
TEL:(82)31-702-3811 / FAX:(82)31-702-3881

TAIWAN 8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070
TEL:(886)3-572-9200 / FAX:(886)3-572-9300

CHINA HONG KONG Unit 1706, 17/F., Greenfield Tower, (South)Concordia Plaza, No.1 Science Museum Road, T.S.T.East, Kowloon, H.K.
TEL:(852)2620-5799 / FAX:(852)2620-5771

SHANGHAI Room 102, Building 4, No.1999 Shenkun Road, Minhang District, Shanghai,China
TEL:(86)21-6446-7881 / FAX:(86)21-6446-7882

SHENZHEN 1st floor 102, building 3 of Winlead, Fada road, Bantian Street, Longgang District, Shenzhen
TEL:(86)755-8346-6822 / FAX:(86)755-8346-6866

TIANJIN Room 1601, Sino Ocean International Center, No. 40 Huachang Road, Hedong District, Tianjin
TEL:(86)22-5856-2051

SUZHOU Room 1010, No.188 Wang Dun Road, GENWAY BUILDING, Suzhou City Industrial estate Distric, Jiangsu, CHINA
TEL:(86)512-6878-4428 / FAX:(86)512-6878-4438

